




ensutec I Environment and Surface Technologies

The Revolution in the application!

Enriched atomised air for moisture-curing solvent-based painting systems as well as air-drying painting systems with femaBlue 2901.



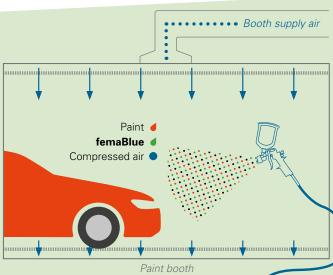


Reliable and fast paint drying and curing

- Same painting conditions all year round
- Increase in capacity
- Material and energy efficiency
- Reduction in CO₂ emissions





Enrichment of atomised air with the ...

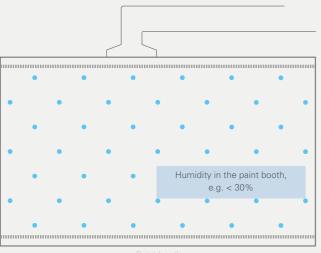

Initial situation (problem):

- Constantly changing climatic conditions
- Year-round process reliability is not guaranteed
- Many different work processes in the paint booth
- Optimum painting process depending on the ambient climatic conditions
- Relative humidity in the paint booth is often not sufficient for the requirements of various painting systems




State-of-the-art (current solution)

Technical humidification of the booth supply air is required to achieve the minimum requirement of 40-60% relative humidity.

Disadvantages:

- Humidification of large volumes of air is necessary
- High demand for deionised water
- High investment costs
- High energy costs
- Risk of microbial contamination
- Long process times due to changing climatic conditions in the paint/drying booth
- Rusting paint booths

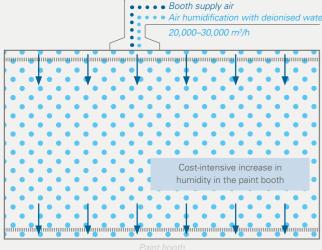

Painters are thrilled about the "Revolution"


- High painting quality
- Improved distribution
- Better paint stability
- Fewer paint runs
- Less dust and dirt entrapment
- Reduction in outlay for finishing work
- Reduced overspray
- Pleasant painting conditions
- Reliable adherence to the required humidity in changing climatic conditions
- The reaction with the paint and therefore the curing already take place in the paint jet
- Painters do not have to change the way they work when using the airmatic-Revolution



... airmatic-Revolution!



Enrichment of atomised air with **femaBlue 2901**

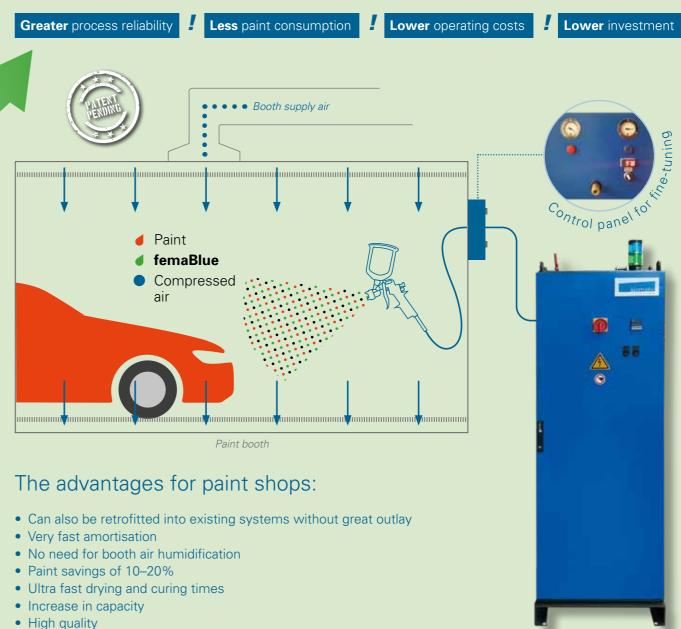



Reduced or no oven drying is required

through a reactor with nanotechnology

Material and energy efficiency

Process reliability

With all its advantages:

• The admixture of other specially selected additives is possible

The full version of the airmatic-Revolution can also be combined with airmatic spray **optimisation** in manual painting. This means that you also benefit from optimised and more efficient paint spraying.

Paint savings of up to 20%!





ensutec I Environment and Surface Technologies

Tested positively by well-known paint manufacturers!

- Paint savings of more than 10% are possible
- Low paint drying and curing times
- Increase in capacity by up to 50% is possible
- Reliable year-round painting without constant climatic changes



Aviation and aerospace

Bodywork and car repair shops

airmatic-Revolution is suitable for

• Moisture-curing solvent-based painting systems

• Air-drying painting systems

ensutec™ Products GmbH

Keltenstraße 13 88499 Altheim Germany

Tel: +49 (0)7371 96664-20 Fax: +49 (0)7371 96664-29 info@ensutec-products.de www.ensutec-products.de



